

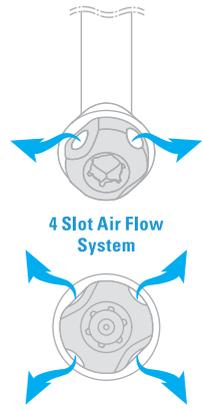


Clík Valve® is a registered trademark of Clík Corporation, used under license. U.S., U.K., EU, and Foreign Utility and Design Patents Granted and Pending

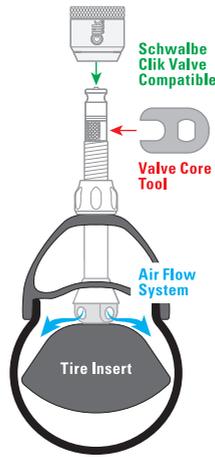

Wheel Rim Height Compatible Range




Valve Size 44mm
Rim Height \leq 30mm

Installation Instructions


A CLIK® TLR VALVE PRO

- Remove valve cap, valve nut and O-ring.
- Insert valve through valve hole in rim, ensuring correct alignment.
- Install O-ring onto valve stem.
- Secure valve base using T25 nut and thread valve nut onto valve stem.
- Hand tighten valve nut until rubber cone seals against inner rim, avoid overtightening.
- To tighten or loosen valve core, use integrated valve core tool.
- Install valve cap.


1 Install valve on rim

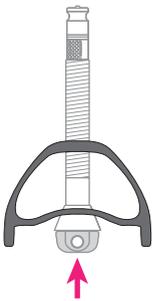

2 Hold and twist valve nut

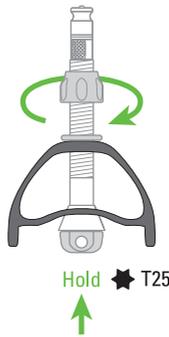

3 Install valve cap

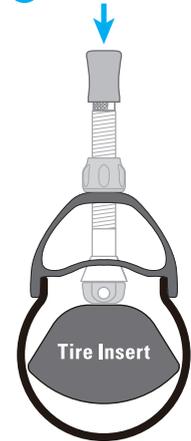

B Valve Core Tool

